


### The Matchbox® 360-12



#### **MORE AIR= BETTER QUALITY, FASTER**

Patented air flow technology means 3x more air than traditional impingement.

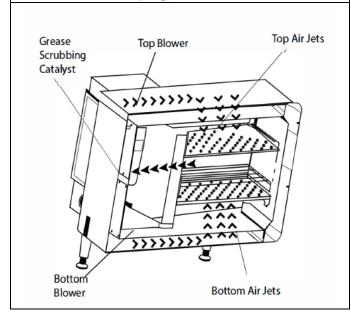

### STANDARD FEATURES

- ✓ Independently controlled top and bottom blowers with speeds up to 567 CFM (ft³/min)
- ✓ Reduced energy consumption (documentation available)
- ✓ Less impact on HVAC costs (documentation available)
- ✓ Precision Impingement™ utilizes hot air for a fast, high- quality cook without microwaves
- ✓ FlexTemp technology changes cavity temperature by up to +/- 25°F between cook cycles
- ✓ Load and unload food automatically
- ✓ Warranty 1 year parts and labor

### **OPERATION**

- ✓ Touch screen display with security passcode and countdown timer
- ✓ Holds up to 600 multistage recipes
- ✓ USB port upload and download recipes, view cook logs, diagnostic mode

## **PERFORMANCE**

- ✓ Fits up to a 12" pizza, or (3) 7" pizzas
- ✓ Grill, roast, bake, steam, broil, and air fry
- ✓ Use any oven-safe pans. Specialty pans available

#### CONSTRUCTION

- √ 304 stainless steel interior
- √ 430 stainless steel exterior
- ✓ Easy to clean design (filters and jet plates are dishwasher safe)
- ✓ Decorative coverings or powder coat available

### **VENTILATION**

- ✓ No hood system required\*
- ✓ UL listed for operation without a Type 1 hood in
- ✓ accordance with EPA 202 test
- UL and cUL listed for multiple stacking configurations
- ✓ Performs 2.5X better than the required UL"
- \*Type 2 hood necessary if HVAC cannot accommodate thermal load







#### PROUDLY MADE IN THE USA

Shorf Form Specification: Provide Ovention Matchbox® 360-12 Precision Impingement™ Oven with patented triple-layer impingement jet plates made of 304 stainless steel to maximize heat transfer, (2) half-moon cook surfaces capable of fitting 12" pizza, electric, certified UL and cUL ventless, countertop, internal catalytic filtration, intuitive digital display interface, two 1/3HP variable-speed motors, built-in self-diagnostics, 430 stainless steel front, top, sides and back, cool touch exterior, 304 stainless steel interior, USB menu upload capability, Autoload and Auto unload with built in queueing ability to virtually eliminate lag time between cooks, FlexTemp almost instantly changes +/- 50F between cooks, 4" adjustable height legs, 6400 heater watts, 25/28 amps, 208-240v/60hz/1-ph, NEMA 6-30P, Made in USA.








# The Matchbox® 360-12



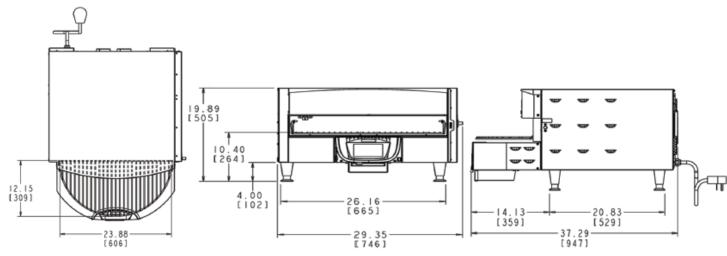

Inches [millimeters]

|           |          | ELECTRICAL SI |
|-----------|----------|---------------|
| Height    | 15.9"    | 405mm         |
| With Legs | 19.9"    | 505 mm        |
| Width     | 29.4"    | 746 mm        |
| Depth     | 37.3     | 947 mm        |
| Weight    | 211 lbs. | 84 kg         |
| Minimum   | 0" Тор   | 0 mm Top      |
| Clearance | 2" Back  | 51 mm Back    |
|           | 0" Side  | 0 mm Side     |

| <b>CAVITY DIMENSIONS**</b> |                                 |                                    |  |  |
|----------------------------|---------------------------------|------------------------------------|--|--|
| Height                     | 3.5"                            | 89 mm                              |  |  |
| Width                      | 23.9"                           | 607 mm                             |  |  |
| Depth                      | 12.3" [12" pie /<br>custom pan] | 311 mm [30 cm<br>pie / custom pan] |  |  |

| CITICATIONS     |             |           |  |  |
|-----------------|-------------|-----------|--|--|
| Model<br>Number | M360-12     |           |  |  |
| Temperature     | 82-525 °F   | 28-274° C |  |  |
| Voltage         | 208-240 VAC |           |  |  |
| Heater Watts    | 6.4 kW      |           |  |  |
| Amperage        | 25-28       |           |  |  |
| Phase           | 1 ph        |           |  |  |
| Frequency       | 60 Hz       | NEMA 6-30 |  |  |
| Cord Length     | 72"         | 1829 mm   |  |  |

| SHIPPING INFORMATION |                              |               |  |  |
|----------------------|------------------------------|---------------|--|--|
| Cube                 | 32x40x49"                    | 81x102x125 mm |  |  |
| (LxWxH)              |                              |               |  |  |
| Shipping             | 275 lbs.                     | 124.7 kg      |  |  |
| Weight               |                              |               |  |  |
| Freight Class        | 175                          |               |  |  |
|                      |                              |               |  |  |
| Point of Origin      | Sturgeon Bay, Wisconsin, USA |               |  |  |





<sup>\*\*</sup> Measurements: actual [useable] dimensions

<sup>\*\*</sup>Ovention, Inc. reserves the right to make technical improvements