




The Finishing Conveyor 1400



High-Speed Finishing Excellence

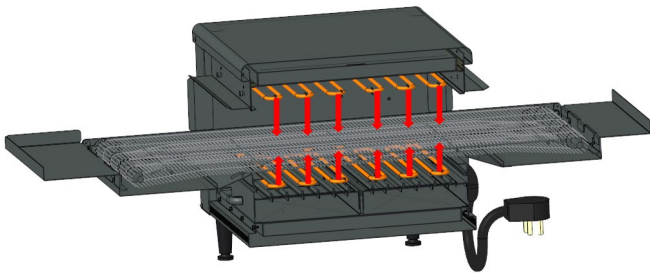

STANDARD FEATURES

- All models have quick-heating infrared heating elements and special microprocessor to control the temperature and cook time.
- Touch screen display with security passcode
- Small footprint giving high return per square foot of counter space.
- Extremely Quiet – maximum noise level 40dB
- Independent top and bottom heater controls from 0% -100%
- Independently control top heat, bottom heat, and belt speed.
- Belt direction and speed control 10-180s
- 1 Year parts and labor warranty

PERFORMANCE

- Melts cheese in as little as 20 seconds
- Fits up to 14" pizza, half size sheet
- Use any oven-safe pans. Specialty pans available
- Perfect for melting toppings, finishing foods like potato skins, soup, nachos, as well as toasting buns and bread.
- Great for thermalizing frozen or fresh foods like appetizers, French fries, and pizza.

CONSTRUCTION

- 304 stainless steel interior, 430 stainless steel exterior
- Conveyor assembly, crumb drawers, cavity tunnels, crumb trays, and belt covers removable for easy cleaning

VENTILATION

- cULus certified for ventless operation



Short Form Specification: Provide Ovention Finishing Conveyor 1400 made of 304 stainless steel to maximize heat transfer, high-throughput conveyor mode, stackable 3 high, 14.6" X 18.5" cavity, 39.6" Belt, 430 stainless steel front, top, sides and back, cool touch exterior, 304 stainless steel interior, Designed, manufactured, and technical support in USA.

Ask about our **anti-microbial powder coat** - standard for all available colors




OventionOvens.com | 855.298.6836 | connect@ventionovens.com




Search Ovention to download our app.



The Finishing Conveyor 1400 Oven

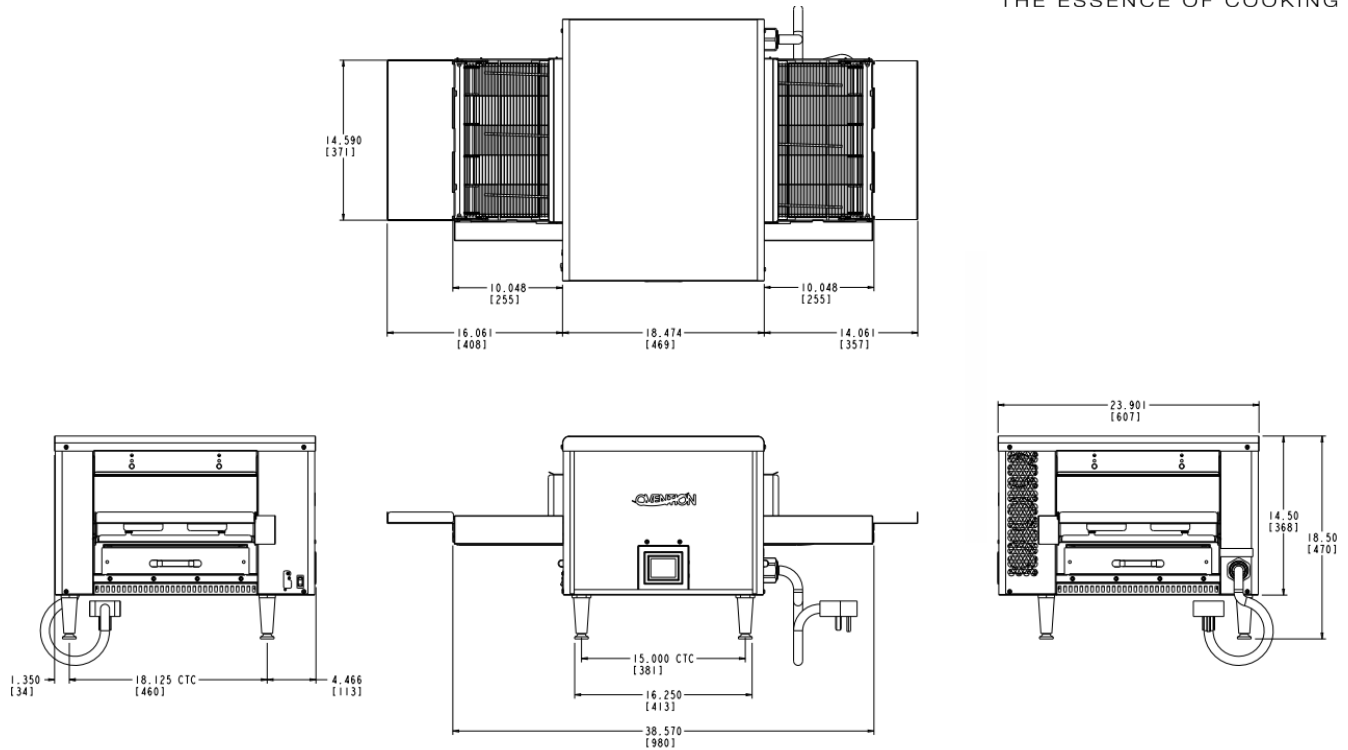

ELECTRICAL SPECIFICATIONS		
Model Number	F1400	
Max Temperature	825F	440C
Voltage	208-240 VAC	 NEMA 6-50**
Max Heater Output	6.9 kw	
Amperage	29**	
Phase	1	
Frequency	60 Hz	
Cord Length	58"	1473 mm

EXTERIOR DIMENSIONS		
Height	14.5"	368 mm
With Legs	18.5"	470 mm
Width	39.6"	1006 mm
Depth	23.8"	605 mm
Weight	110 lbs.	50 kg
Minimum Clearance	0" Top	0 mm Top
	1" Back*	25 mm Back*
	1" Side*	25 mm Side*

SHIPPING SIZE		
Cube (LxWxH)	55x34x31"	1400x860x790mm
Shipping Weight	174 lbs	79 kg
Freight Class	175	
Point of Origin	Sturgeon Bay, Wisconsin, USA	

CAVITY DIMENSIONS		
Height	4"	102 mm
Width	14"	356 mm
Depth	17.1"	434 mm

*7" clearance required for combustible surfaces, double and triple stack required clearances vary.

**24A, NEMA 6-30 product also available. Ovention, Inc. reserves the right to make technical improvements.



OventionOvens.com | 855.298.6836 | connect@oventionovens.com

Search Ovention to download our app.

