




The Conveyor C2600

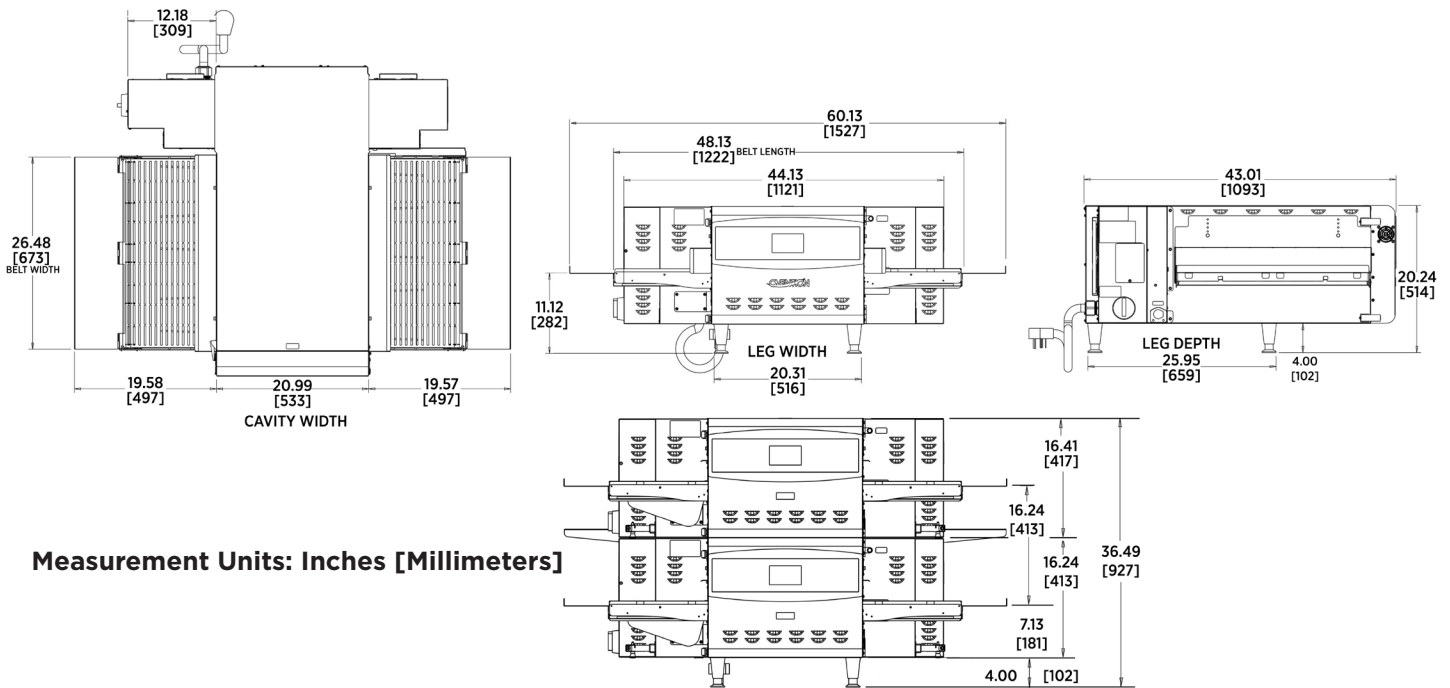

Measurement Units: Inches [Millimeters]

DIMENSIONS		
HEIGHT	20.24"	514 mm
WIDTH	48.13"	1223 mm
DEPTH	43.0"	1092 mm
WEIGHT	266 lb.	121 kg
CAVITY DIMENSIONS		
HEIGHT	3.5"	89 mm
WIDTH	26.5"	673 mm
DEPTH	21"	533 mm
BELT WIDTH OPTIONS		
SINGLE	26"	660 mm
50/50	12.5 X 12.5"	318 X 318 mm
70/50	17 X 8"	432 X 203 mm
MINIMUM CLEARANCE		
LEFT/RIGHT/BACK	1/1/1"*	25/25/25 mm*

*If units are stacked, 6" (152 mm) back and side clearance needed

SHIPPING INFORMATION		
CUBE (LxWxH)	61 x 49 x 32"	1550 x 1250 x 813mm
SHIPPING WT.	356 lb.	161 kg
FREIGHT CLASS	175	
POINT OF ORIGIN	Sturgeon Bay, WI, USA	

ELECTRICAL SPECIFICATIONS			
US/CANADA 3ph	208-240V/60Hz/3-ph, 37 amps NEMA 15-50P and cord - standard	Max Input: 18.7kW Heater Input: 17.4kW	NEMA 15-50

SHORT FORM SPECIFICATIONS

Provide Ovention Conveyor C2600 Ventless Precision Impingement Oven, Rapid Cook, countertop, one 48.25" long x 26.5" wide belt, 50/50 split belt 12.5"x12.5", or 70/30 split belt 17"x8", 21" cook chamber, triple-layer impingement™ jet plates, touch screen display, built-in self-diagnostics, USB menu upload, smart voltage sensor technology, cool to touch 430 ss exterior, 304 ss interior, two 2/3HP variable speed motors, internal catalytic filtration, 4" adjustable legs, 208-240V/60hz/3-ph, 18.7 kW, NEMA 15-50P, Made in USA, cULus, UL EPH Classified, ANSI/NSF 4.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Ovention® exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



OventionOvens.com | 855.298.6836 | connect@ventionovens.com

Search "Ovention" to download our app.

